




P2201-S

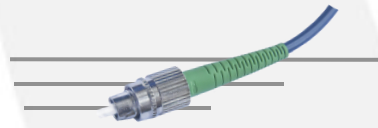

1550 nm SM Patchcord, 3 mm Buffer

The P2201-S is a 1550 nm SM patchcord, 3 mm buffer. It offers very low insertion loss, high return loss, high extinction ratio, high stability and reliability. It can be used for optical fiber amplifiers, test instrument, fiber sensor, research and fiber laser.


FEATURES

- Low Insertion Loss
- High Return Loss
- High Extinction Ratio
- High Reliability
- High Stability

USE IN

- Optical Fiber Amplifiers
- Test Instrument
- Fiber Sensor
- Research
- Fiber Laser

Dimensions

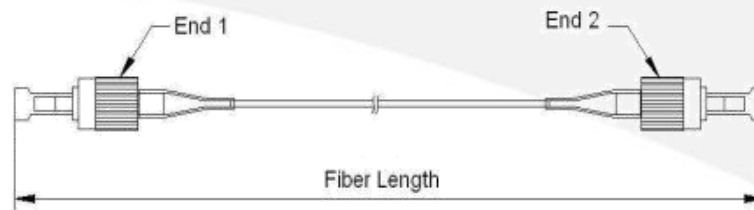

Connector Type	FC/APC
Center Wavelength	1550 nm
Insertion Loss	0.5 nm max.
Extinction Ratio@23°C	23 dB min.
Return loss	60 dB min.
Fiber Type	SMF-28E
Key Orientation	Slow Axis
Tolerance for Axis Alignment	±3 deg
Diameter	3 mm Buffer
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +85°C

Product	P2201-S		
Price	1 pcs	10+ pcs	100+ pcs
	\$ 15.00	\$ 12.75	\$ 7.50
Status	1-2 weeks		

Optical
Fiber

Optical
Fiber