




# P2200-S

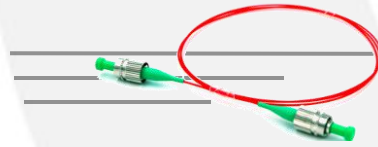

## 1550 nm SM Patchcord, 900 um Buffer

The P2200-S is a 1550 nm SM patchcord, 900 um buffer. It offers very low insertion loss, high return loss, high extinction ratio, high stability and reliability. It can be used for optical fiber amplifiers, test instrument, fiber sensor, research and fiber laser.


### FEATURES

- Low Insertion Loss
- High Return Loss
- High Extinction Ratio
- High Reliability
- High Stability

### USE IN

- Optical Fiber Amplifiers
- Test Instrument
- Fiber Sensor
- Research
- Fiber Laser

### Dimensions

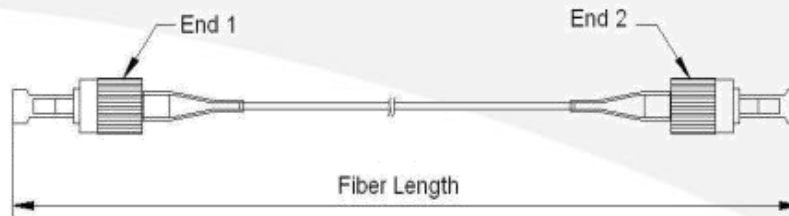

Connector Type	FC/APC
Center Wavelength	1550 nm
Insertion Loss	0.5 nm max.
Extinction Ratio@23°C	23 dB min.
Return loss	60 dB min.
Fiber Type	SMF-28E
Key Orientation	Slow Axis
Tolerance for Axis Alignment	±3 deg
Diameter	900 um
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +85°C

Product	P2200-S		
Price	1 pcs	10+ pcs	100+ pcs
	\$ 15.00	\$ 12.75	\$ 7.50
Status	1-2 weeks		

Optical  
Fiber

Optical  
Fiber